
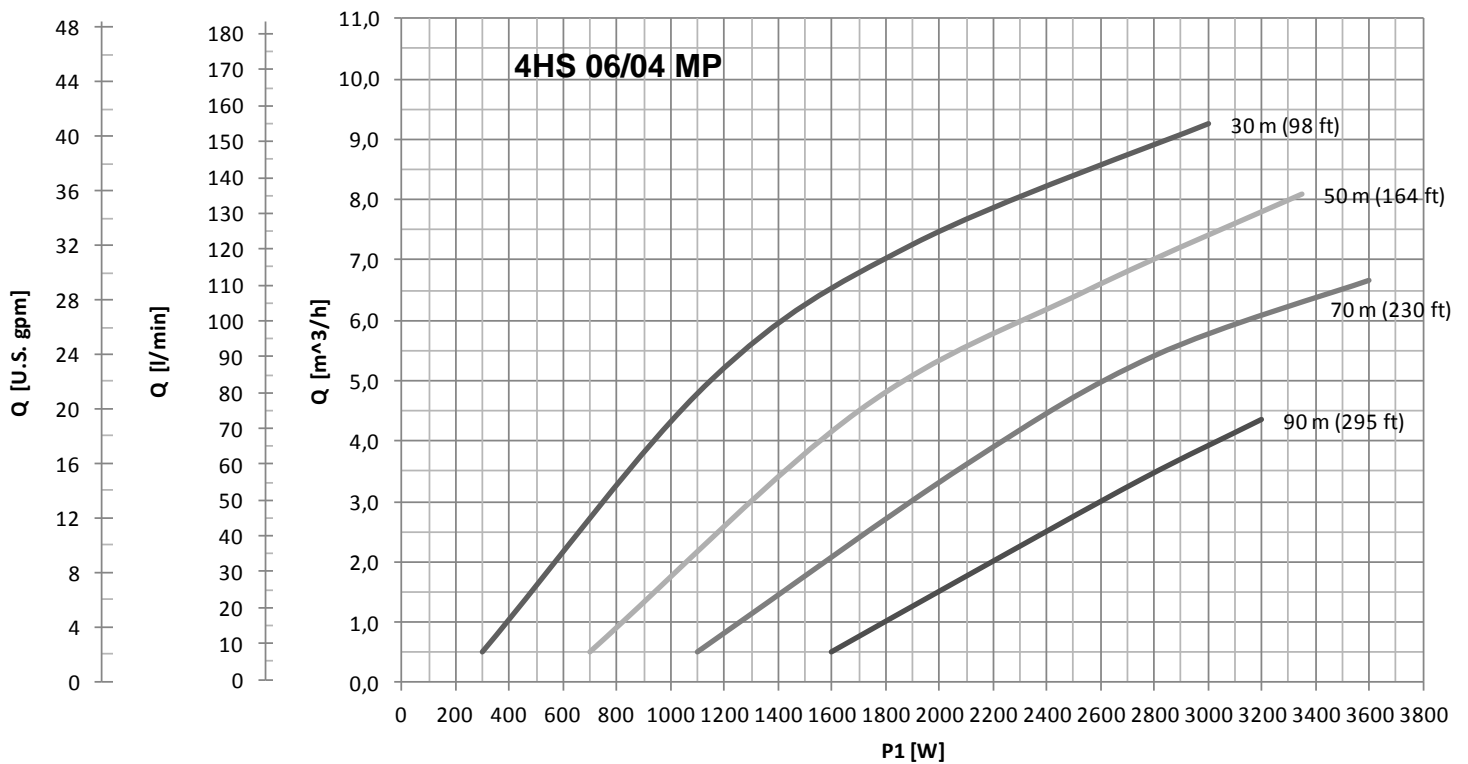


Performance

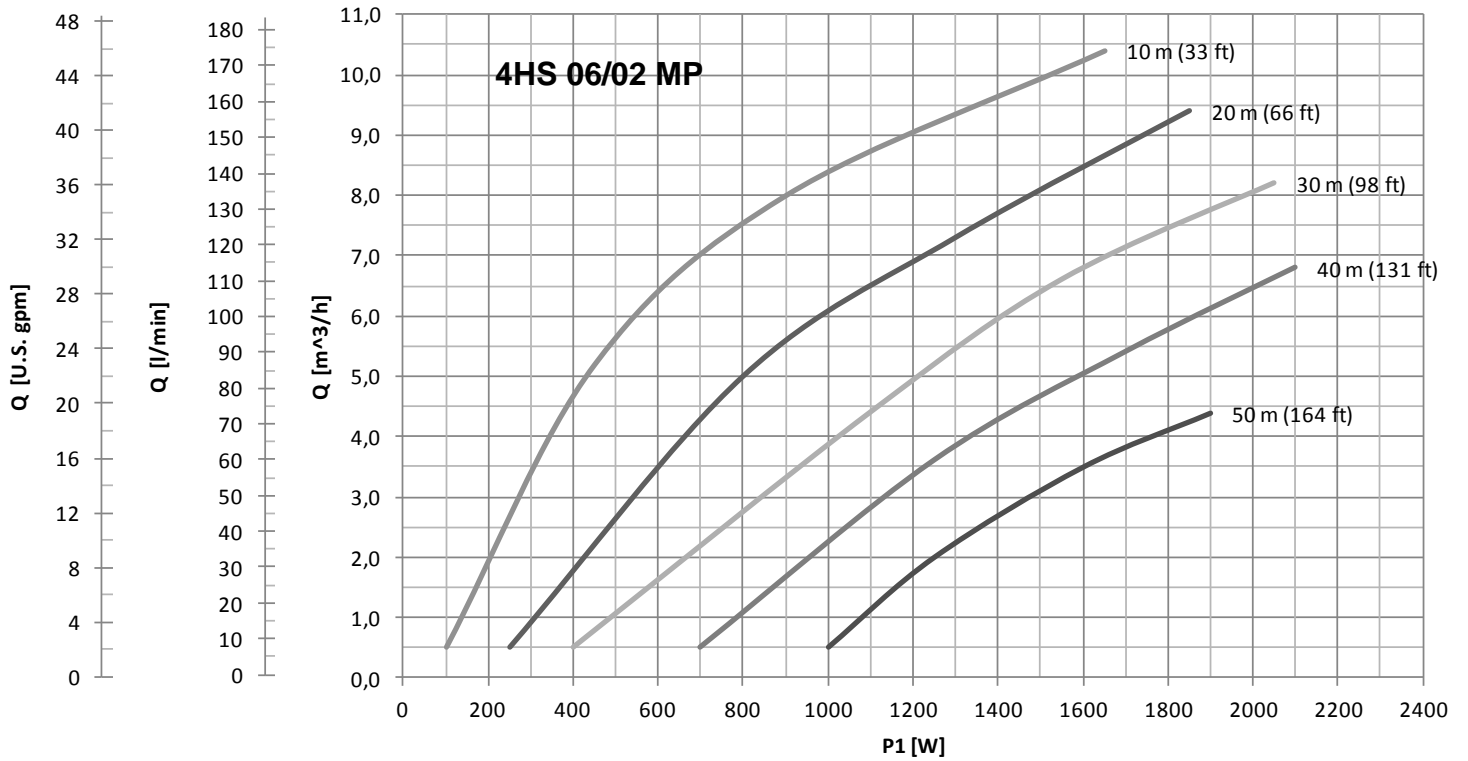

Model	Voltage	Max. absorbed current	Power factor	Max absorbed power	Dimension	Delivery	Pump weight	Max. diameter	Packing size	Total weight
4HS		[A]		P1 [W]	[mm]		[kg]	[mm]	[cm]	[Kg]
06/02 MP	90 - 340 VDC 90 - 265 VAC	16 (130 VDC) 16 (130 VAC)	1	2100	894	1 1/2 "	19,2	101 *	120x20x29	20
06/04 MP	90 - 340 VDC 90 - 265 VAC	16 (225 VDC) 16 (225 VAC)	1	3600	981	1 1/2 "	21,4	101 *	120x20x29	22

* Max. external diameter including cable and cable cover