

Fresh water chlorinator with digital display, temperature sensor and highly resistant polycarbonate enclosure. Ideal for indoor pools with metallic elements affected by salt.

- › Latest generation power supply, with higher performance, low electrical consumption and fully waterproof (IP67 protection)
- › Works with a concentration of mineral salts between 0.5 to 1.5 g/l
- › Self cleaning titanium monopolar cell with high production efficiency
- › A single command button and side switch to turn on and off
- › Large LCD display with simple and intuitive menu
- › Temperature probe with automatic hibernation function
- › Electronic flow and coverage detector
- › Electronic electrolysis time meter
- › Standby input contact for external controllers



| Specifications |

Power Supply: 220/240VAC 50/60Hz
Cell: Monopolar, with self cleaning function and double MMO coating
Cell Assembly: Vertical and horizontal
Cell Connections: ø63mm or ø50 mm (rings included)
Cell lifetime: 6.000h*
Salinity Range: 0.5 to 1.5 g/l (10% of standard chlorinators)
Water Flow: From 5 m³/h to 30 m³/h
Water Pressure: Tested at 5 Bar
Water Temperature Range: From 12°C to 40°C
Room Temperature: Tested at 50°C
Reverse Polarity: From 3h to 8h
Cooling: Forced with ventilation
Warranty: 2 Years




L275mm X A285mm X P125mm

A315mm ø63mm

* Lifetime can vary based on the salinity level, reverse polarity running cycle and water chemical balance.

6.000	0.5 g/l	KG	PCBox	⚡	2 YEARS	°C	OPTIONAL ORP	OPTIONAL Ground Kit
Hours	Lowest Salt Concentration	Low Weight	Polycarbonate Box	Low Consumption	Warranty	Temperature Sensor	ORP Control	Ground Kit

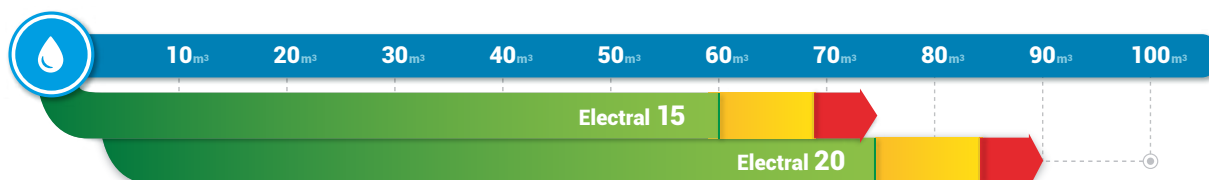

ELECTRAL MODELS

CODE 100002165	MODEL Electral 15A	CORRENT IN THE CELL 15A
CODE 100002166	MODEL Electral 20A	CORRENT IN THE CELL 20A